


PROFILER R

TACTILE SENSOR FOR ROUGHNESS MEASUREMENT ON CMMs



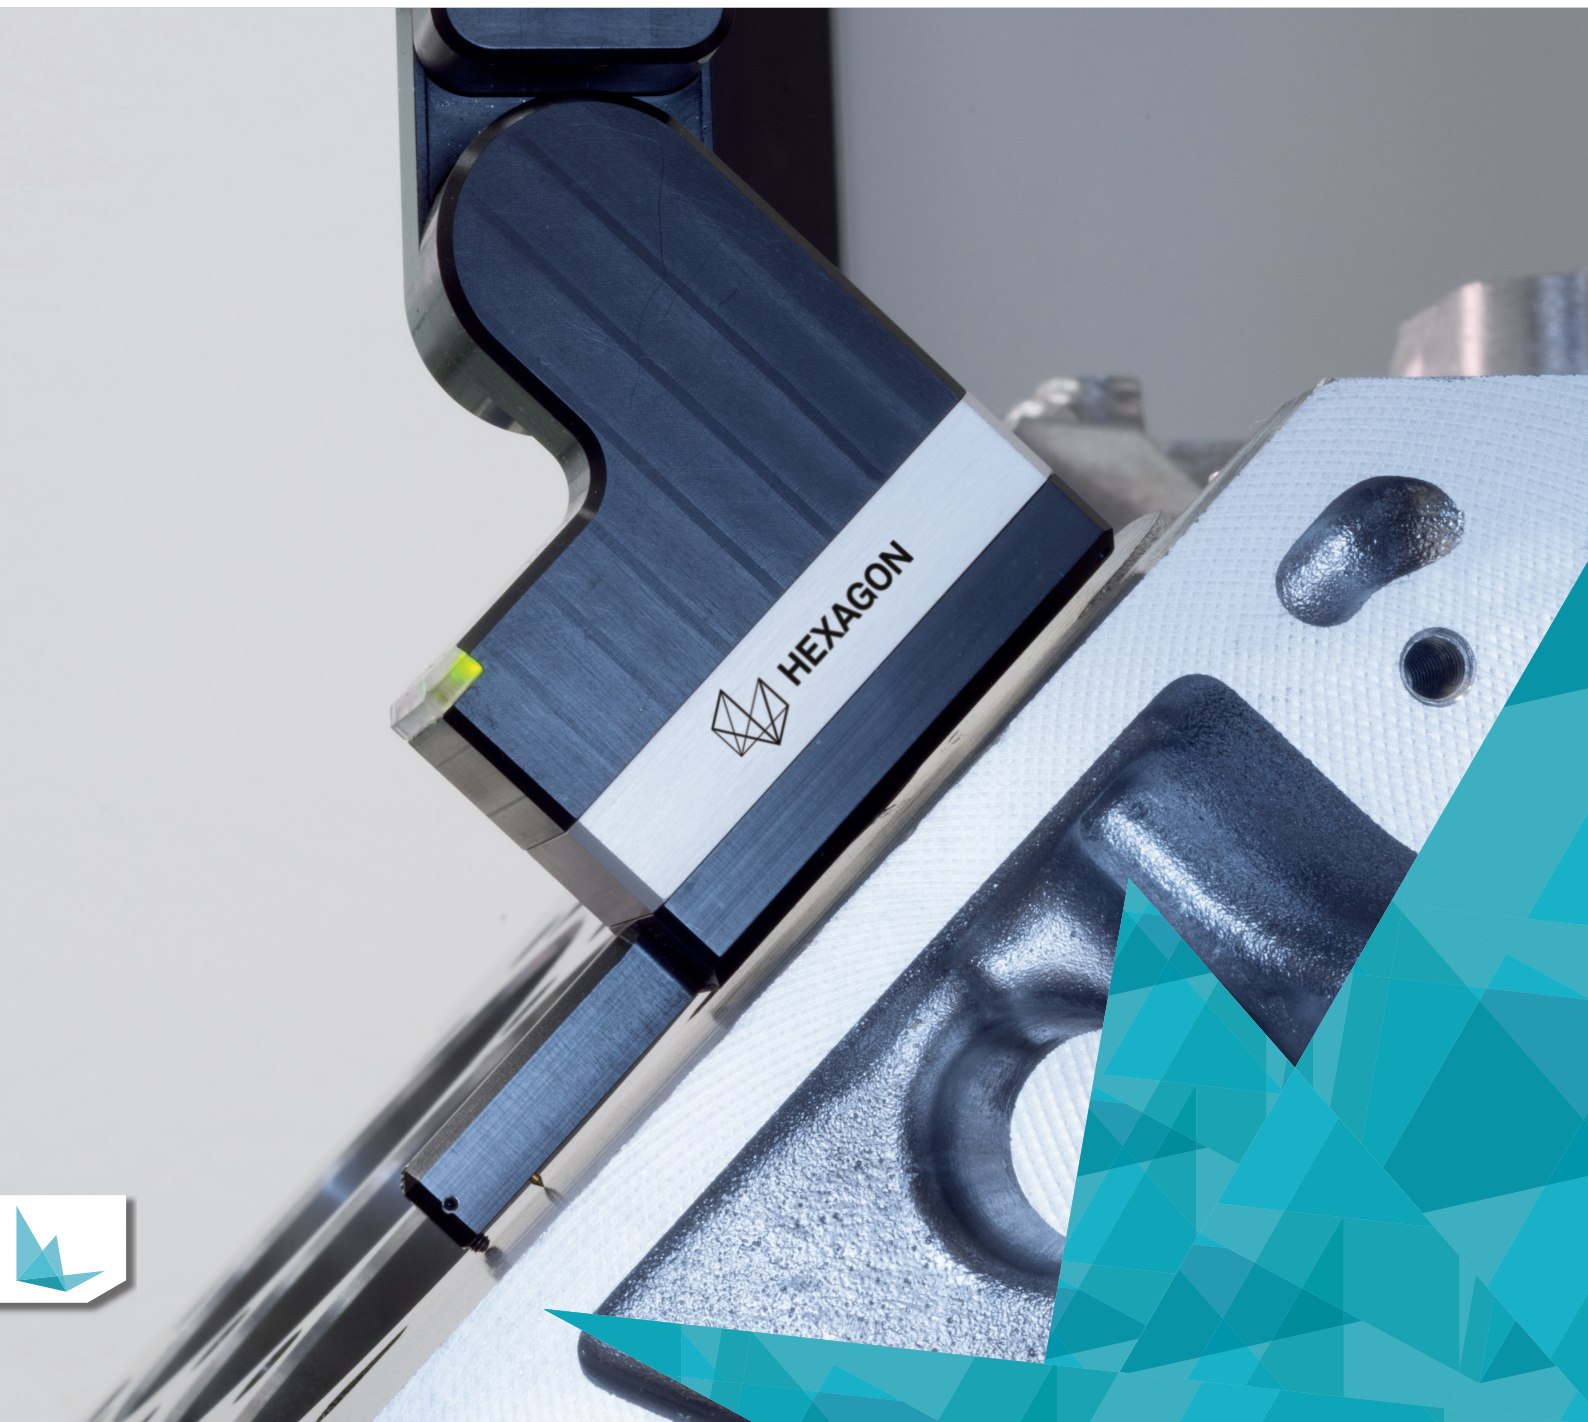

PROFILER R

COMPLETE YOUR CMM WITH ROUGHNESS MEASUREMENTS

“Total Inspection” is an increasingly important concept in metrology today. The goal is to have complete control of all relevant parameters of a workpiece in order to ensure full functionality within the lifecycle.

The PROFILER R miniature roughness sensor supplements the existing Hexagon sensor range. In addition to all standard measurements and evaluations of a CMM, it allows easy and quick measurements in the same setup. Transport and changeover times are reduced, enabling a much more efficient process for quality assurance.


In the past, roughness was typically measured using manual roughness measurement devices. The results were heavily dependent on the awareness and skills of the machine operators. The PROFILER R is the solution for this problem, with the fully automatic CNC integration reducing the potential for mishandling.



Save time by avoiding lengthy manual setup and changeover processes.”

THE MEASUREMENT SOLUTION FOR PROFILE AND SURFACE ROUGHNESS ON CMMs

The texture of the workpiece surface is more important than ever in quality assurance. Using the PROFILER R roughness sensor, this can be measured without reclamping the workpiece on your local CMM. The PROFILER R supports all common roughness parameters according to DIN EN ISO 4287 and DIN EN ISO 13565, for example the arithmetical mean roughness value (Ra), average roughness profile height (Rz) or the mean width of profile elements (RSm).

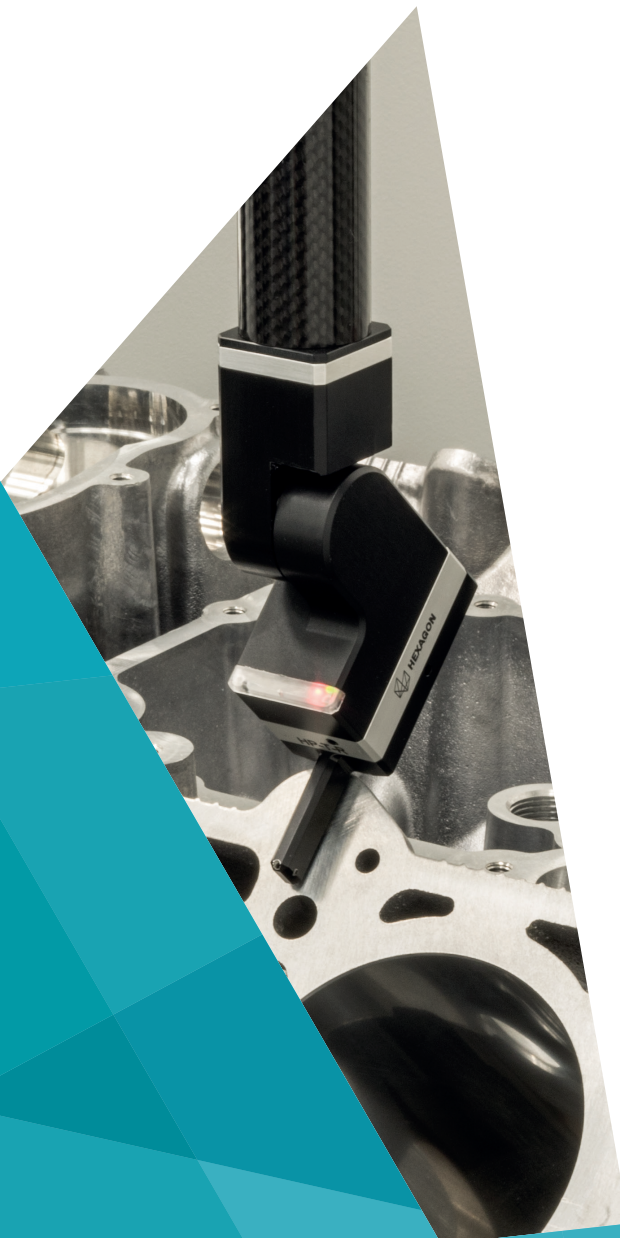


- Established measurement process
- Reduced transport and setup times
- All results shown in one report
- Measurement length of up to 15 mm
- User interface in QUINDOS
- Extremely high positioning accuracy
- Analysis conforming to DIN EN ISO
- Further roughness measurement devices redundant - saving space and investment costs
- Powered by the probe head
- Integrated rotary / pivoting axis (360° / 180°)
- Wireless data transmission increases flexibility
- Sensor can be exchanged automatically
- Extremely small measurement cycle

OFFERING THE BEST POSSIBLE POSITIONING

The PROFILER R can be automatically loaded into the scanning sensor HP-S-X5 HD and the multisensor probe heads LSP-S2, LSP-S4 and LSP-S2 Scan+. This integration into the probe head enables an extremely high positioning accuracy and the probing is controlled. Even hard to reach areas can be measured without reclamping the workpiece.

The sensor can be rotated through 360° and pivoted by 180°. This makes it easy to adjust to the workpiece conditions and provides maximum flexibility and accessibility.

The complete measurement process takes place within the compact sensor, enabling an extremely short process time. This means a distortion of the measuring data is impossible. During the measurement, the CMM stays absolutely still, avoiding any vibrations or disturbances.

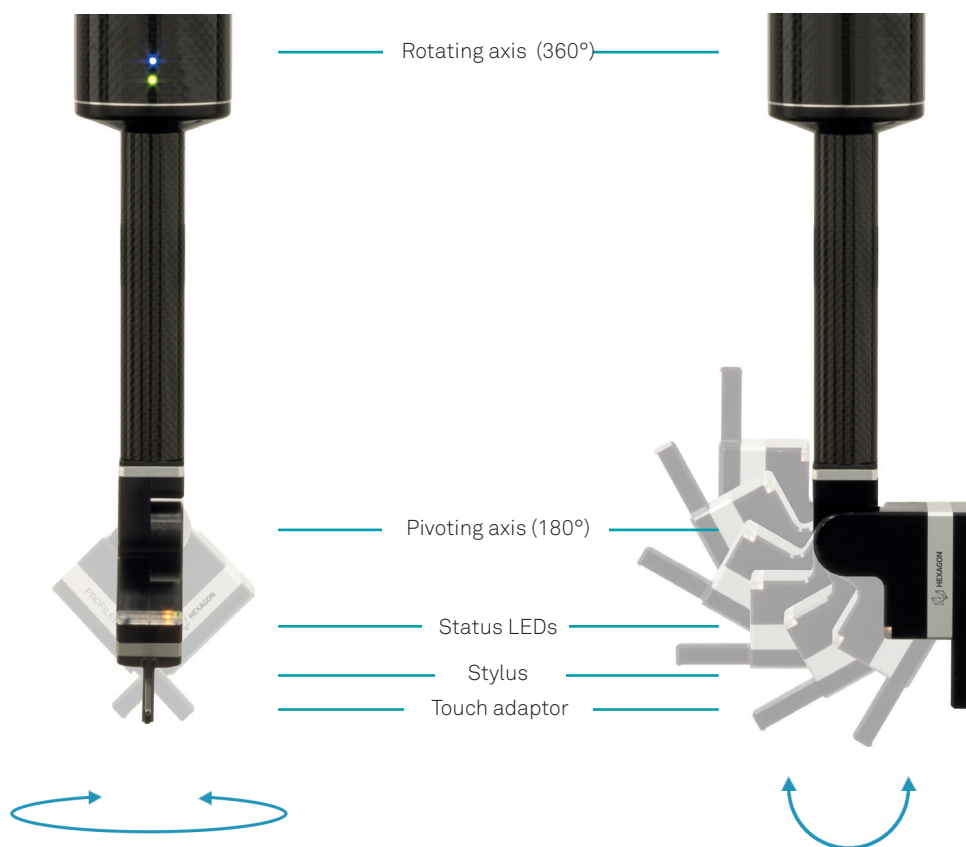

MAXIMUM COMPATIBILITY

The PROFILER R sensor is optimised for use with Leitz ultra-high accuracy CMMs. The tactile sensor can be loaded into the multisensor probe heads on Leitz PMM-C and Leitz Reference line machines.



HP-S-X5 HD


The HP-S-X5 is a centre-mounted, highly-accurate and robust probe head. It features a sophisticated anti-collision system and can accept probe extensions up to 800 mm in length and 650 g in weight.



LSP-S2 | LSP-S4 LSP-S2 Scan+

The LSP-S2, LSP-S4 and LSP-S2 Scan+ probe heads allow the measurement of features deep inside a workpiece. The heads can carry styli configurations up to 1000 g in weight and up to 800 mm in length.

The extremely low Single Stylus Form Error PFTU of the probe heads enables the measurement of complex geometries in very tight tolerances.

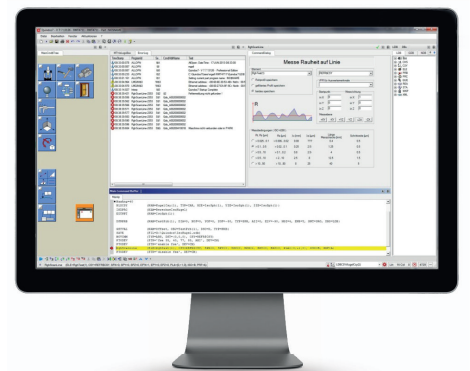

QUINDOS


The “Roughness” option enables the evaluation and analysis of all roughness parameters established in QUINDOS.

The data can be illustrated on a measuring report.

EXTEND YOUR CMM WITH THE PROFILER R

With the help of its built-in rotary and pivoting axes, the sensor can be perfectly positioned for measurements. After the support adaptor touches the workpiece, the measuring stylus is extended. It moves along the surface, collecting the measurement data, whereas PROFILER R remains still throughout the whole measurement.

The surface data gathered is sent to the CMM controller and automatically analysed and illustrated in QUINDOS.

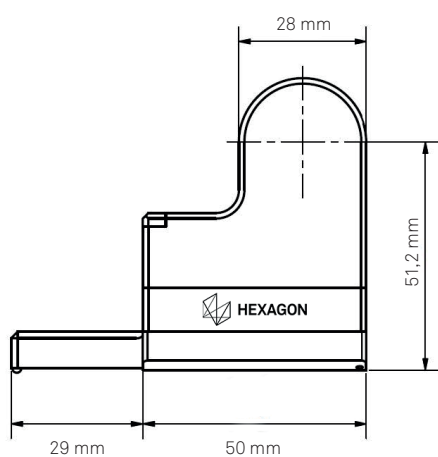

Technical Data

PROFILER R Roughness Sensor

Measuring principle	Stylus instrument (reference plane)
Measuring section	Max. 15 mm
Stylus radius	2 μm (5 μm available on request)
Stylus elbow	90°
Filter	Gauss*
Integrated axis	Rotating: 360° Pivoting: 180°
Weight	630 g
Software	QUINDOS
Evaluation standards	According to ISO 4287 / 13565
Roughness parameters (Stylus radius 2 μm)	Rz, Rt: Up to 10 μm Ra: 50nm to 2 μm

* Others available on request



Hexagon Manufacturing Intelligence helps industrial manufacturers develop the disruptive technologies of today and the life-changing products of tomorrow. As a leading metrology and manufacturing solution specialist, our expertise in sensing, thinking and acting – the collection, analysis and active use of measurement data – gives our customers the confidence to increase production speed and accelerate productivity while enhancing product quality.

Through a network of local service centres, production facilities and commercial operations across five continents, we are shaping smart change in manufacturing to build a world where quality drives productivity. For more information, visit HexagonMI.com.

Hexagon Manufacturing Intelligence is part of Hexagon (Nasdaq Stockholm: HEXA B; hexagon.com), a leading global provider of information technologies that drive quality and productivity across geospatial and industrial enterprise applications.

-  COORDINATE MEASURING MACHINES
-  3D LASER SCANNING
-  SENSORS
-  PORTABLE MEASURING ARMS
-  SERVICES
-  LASER TRACKERS & STATIONS
-  MULTISENSOR & OPTICAL SYSTEMS
-  WHITE LIGHT SCANNERS
-  METROLOGY SOFTWARE SOLUTIONS
-  CAD / CAM
-  STATISTICAL PROCESS CONTROL
-  AUTOMATED APPLICATIONS
-  MICROMETERS, CALIPERS AND GAUGES



福宮通商股份有限公司

總公司: 新北市 235 中和區連城路 258 號 3F-3
(遠東世紀廣場 I 棟)
Tel: 02-82271200 Fax: 02-82271266
Http:// www.fullbright.com.tw
E-mail : sales@fullbright.com.tw

台北	Tel: 02 - 82271227	Fax: 02 - 82271191
台中	Tel: 04 - 24736300	Fax: 04 - 24734733
高雄	Tel: 07 - 3430270	Fax: 07 - 3430296
昆山	Tel: 512 - 57751291	Fax: 512 - 57751293
東莞	Tel: 769 - 85847220	Fax: 769 - 85847229

www.fullbright.com.tw